


MINI MAG BOLTED ARM OPTION

Installation Instructions

The Bolted Arm Option is an alternative to the traditional welded arm that is easier to handle and install without a compromise in strength. The Bolted Arm Option includes the following...


- I. (1) 1500lb Bolted Arm Backbone
- II. (1) 1500lb Bolted Arm Shoulder
- III. (2) 1500lb Arm
- IV. (12) $5/8 \times 1 \frac{1}{2}$ Galv Hex Bolt
- V. (12) 5/8 Galv Nut

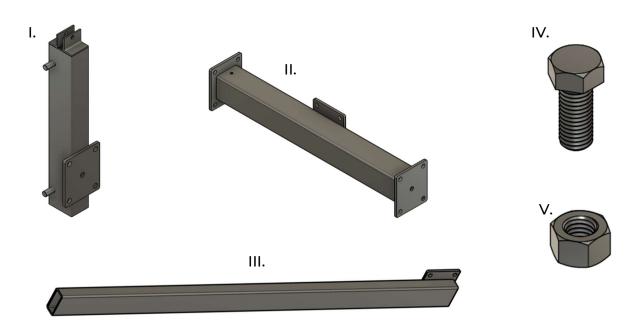

^{*}Images are not to scale

**Once you have the track installed and secured, you are ready to assemble the bolted arm. **

1) Before putting the backbone into the track, you must bolt the backbone and shoulder together.

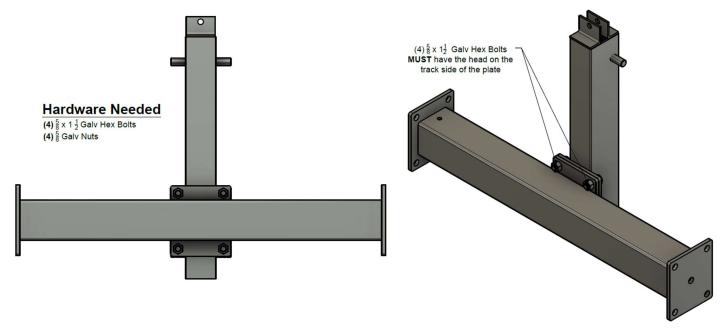

- 2) Insert the assembled backbone and shoulder into the track from the top so that the tabs for the sheave are facing up.
- 3) Finally, bolt the arms to the shoulder.

